

## ARDEX A48

### Rapid Set Screed Mix

ARDEX A 48 is a rapid set cement screed preparation that has been designed for all types of floor coverings and is especially effective when installing moisture sensitive coverings. The rapid cure allows floor coverings to be installed quicker than regular screeds. **LOW VOC**



#### SUBSTRATES

- ARDEX WPM 750 Undertile Butynol® waterproofing system, undertile waterproofing membranes, tiles, natural Stones, terrazzo, resilient and textile floor coverings and parquet.

#### LOCATION

- Internal, External

#### COVERAGE

- 1m<sup>2</sup> per 10mm

#### THICKNESS

- Unbonded at least 35mm; and preferably 40mm thick. Maximum thickness is 70mm. Heated floors normally require greater than 45mm thick
- Bonded screed it must be at least 15mm and a maximum of 50mm

#### DRYING TIME


- Can be walked on and is ready to receive tiles after approximately 4 hours
- Ready for ARDEX Undertile Butynol® and smoothing cements after 24 hours
- Ready to receive ARDEX approved liquid undertile membranes, parquet, resilient and textile floor coverings after 48 hours

#### PACKAGING

- 2kg triple layered bag

#### CODE

13002

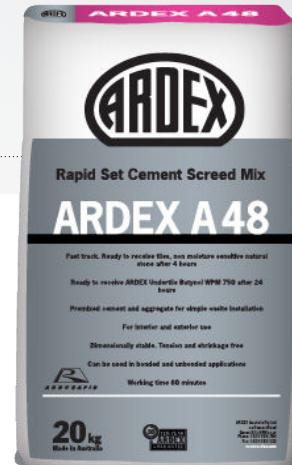

#### ARDEX A48 QUICK FACTS

- Fast track. Ready to receive tiles, non moisture sensitive natural stone after 4 hours
- Ready to receive ARDEX Undertile Butynol WPM 750 after 24 hours



#### CONTACT US

1300 788 780 | [www.ardexaustralia.com](http://www.ardexaustralia.com)



Download the Ardex app  
(search for 'ARDEX Australia')



SYSTEM ARDEX  
PREMIUM PERFORMANCE