

ARDEX K 12 NEW

Levelling and Smoothing Compound

ARDEX K 12 New is designed for experienced commercial contractors to prepare large commercial and retail areas for carpet and vinyl installations. ARDEX K 12 New dries to a super smooth finish eliminating the need for mechanical sanding.

LOW VOC ★

LOCATION

- Internal in above or below grade applications

SUBSTRATES

- New and existing or rough screed concrete, rain damaged concrete which has been mechanically prepared, existing quarry and ceramic tiles, steel decking (contact ARDEX Technical Services), timber Floors (contact ARDEX Technical Services) and damp or moisture vulnerable concrete when used in conjunction with an ARDEX moisture control system

FLOOR COVERINGS

- Linoleum, vinyl, carpet
- Ceramic and quarry tiles
- Timber-parquetry with the addition of ARDEX E 25 if used over ARDEX P 82 and floating

COVERAGE

- 4m² at 3mm

THICKNESS

- 1.5mm to 35mm
- Can be bulk filled using 2–5mm aggregate

DRYING TIME


- Walkable after 2 hours
- Ready for vinyl in 18 hours

PACKAGING

- 20kg triple layered bag

CODE

16631

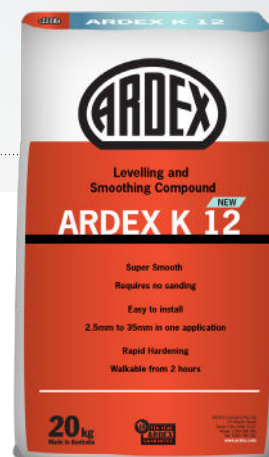

ARDEX K 12 NEW QUICK FACTS

- Super smooth – requires no sanding
- Versatile – apply 1.5mm to 35mm in one application
- Rapid hardening – walkable from 2 hours
- Superior flow – fast application



CONTACT US

1300 788 780 | www.ardexaustralia.com



Download the Ardex app
(search for 'ARDEX Australia')



SYSTEM ARDEX
PREMIUM PERFORMANCE