



Tradies Choice – FS Screeed

DESCRIPTION

Tradies Choice FS Screeed is a fast setting high build modified cementitious screed for use with SAS waterproofing membranes and tile adhesives. Tradies Choice can be used for internal / external applications but not for immersed situations like a swimming pool spas etc. It is suitable for concrete floors and fibre cement sheets prior to tiling.

SUB FLOOR PREPARATION

The surface must be clean, dry firm and free of dust oil, grease, wax and curing compounds. The substrate must be installed according to the relevant standards and manufacturer recommendations. All porous surfaces must be primed with SAS Master Primer. For non-Porous surfaces such as existing tiles, adhesives must be primed using SAS Master Primer neat. Please contact SAS Technical Team for further information.

MIXING

Mix 2 - 2.5 Litres of water to 20kg of Tradies Choice FS Screeed. Mix with a mixing paddle until a creamy consistency is achieved and powder is free of lumps. Allow mixture to stand for 3 minutes remix and use the screed.

Note: Do not over water as this will promote bleed and separation with a reduction in bond and strength.

APPLICATION

Tradies Choice FS Screeed to the primed substrate using a screed bar or trowel to give the required thickness, minimum thickness is 15mm for bonded screeds or external areas, minimum thickness should be 25mm on concrete or 35mm on F/C sheet. Maximum thickness applied in any one application can be up to 200mm. Tradies Choice FS Screeed has a work time of approximately 30 minutes at 23° C

MOVEMENT JOINTS

Movement joints must be in accordance with Australian Standards AS 3958.1-2007

APPLICATION TEMPERATURES

Do not apply Tradies Choice FS Screeed below 5° C and above 40° C

COVERAGE

Tradies Choice FS Screeed will cover approximately 0.5 m² at 25mm in thick

Work Time – 25 min at 23° C

Appearance – Grey powder

Initial set time 2 hours at 23° C

Initial set time 4 hours at 23° C for waterproofing membranes

Final set time 8 hours at 23° C


PACKAGING

20kg

Warranty

- 15 year manufacturers warranty

SDS is available from www.sas-aa.com.au

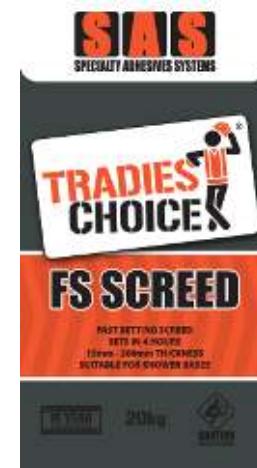

SAS Australasia Pty Ltd
1300 202 894
WWW.SAS-AA.COM.AU

ABN: 83 617 827 282

Disclaimer: The information supplied is to the best of SAS knowledge and is true and accurate. The application of the product is beyond SAS control and any alleged failure or damage must be inspected by a representative from SAS. All workmanship must be carried out in accordance with AS 3958.1-2007.