



Tradies Choice – White Lite

DESCRIPTION

Tradies Choice Premium grade Super white grout is a hard wearing flexible mould resistant polymer modified wall and floor interior and exterior grout for joints 1-5mm wide

Can be used for ceramic, porcelain Stone and mosaic tiles.

CLASSIFICATION

CG2

SURFACE PREPARATION

Ensure joints are clean and free of dust and any excess adhesive prior to grouting .Do not grout until the adhesive and the tiles are set firmly . Remove spacers for all wall and floor joints prior to grouting. For information not listed please contact the SAS Technical Team for further information.

MIXING

Mix 7 litres to 20kg of Tradies Choice White Lite .Mix with a paddle until a creamy consistency is achieved and powder is free of lumps. Allow mixture to stand for 3 minutes, remix then use the grout.

MOVEMENT JOINTS

Movement joints must be in accordance with Australian Standards AS 3958.1-2007


DRYING TIME

Allow the grout to dry for at least 24 hours at 23 ° C

Note :Do not grout in temperatures above 40 ° C and below 5 ° C

COVERAGE

Tile Size Qty of Grout KG/M2	1.5mm	3.0mm	5.0mm
300x 300 x10	0.12	0.2	0.4
300x600x10	0.8	0.2	0.3
600x600x10	0.6	0.12	0.2

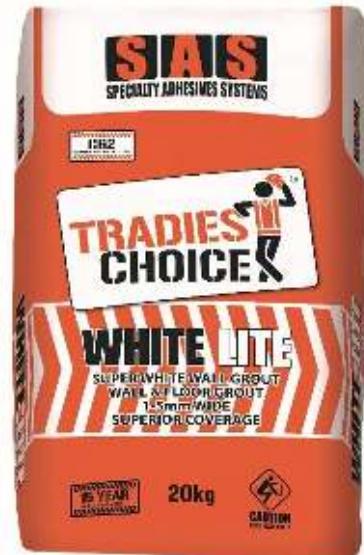

PACKAGING

20kg



SAS Australasia Pty Ltd
1300 202 894
WWW.SAS-AA.COM.AU

ABN: 83 617 827 282

Disclaimer: The information supplied is to the best of SAS knowledge and is true and accurate. The application of the product is beyond SAS control and any alleged failure or damage must be inspected by a representative from SAS. All workmanship must be carried out in accordance with AS 3958.1-2007.



Tradies Choice – White Lite

Applying

- Work the grout in a diagonal motion using a rubber float.
- Ensure the grout joint is completely filled and no voids are left.
- Remove excess grout from the surface in a diagonal motion using a rubber float.
- Allow 15 – 20 minutes for the grout to firm up before cleaning.
- Use a minimum amount of water in cleaning to avoid shade variation, efflorescence and shrinkage.
- Once dry any remaining film left on the tile surface can be removed with a dry cloth.
- For all other applications not mentioned please contact the SAS Technical Team.
- Note: Protect tiling from other trades and weather. Do not allow traffic until all the tiling and grouting is completed.

Precautions

- Tradies Choice White Lite cannot be used for chemical resistant applications. Use Epoxy Grout.
- Tradies Choice White Lite cannot be used in immersed situations such as swimming pools and spas etc.
- Colour shade variations can occur due to tile porosity, finishing techniques and uneven drying conditions also if the adhesive bed is not fully cured, and when excessive mixing and clean up water is used.
- Porous tiles should be sealed prior to grouting to prevent staining.
- Due to the varying degrees of movement inherent in timber floors, it is recommended that Tradies choice White Lite be mixed with Master Additive. (Please refer to Master additive data sheet for mixing instructions)


Technical Data

- **Open Time** – 30 min at 23° C
- **Appearance** – Bright White
- **Return to service dry** – 24 hours

Warranty

- 15 year manufacturers warranty

SDS is available from www.sas-aa.com.au

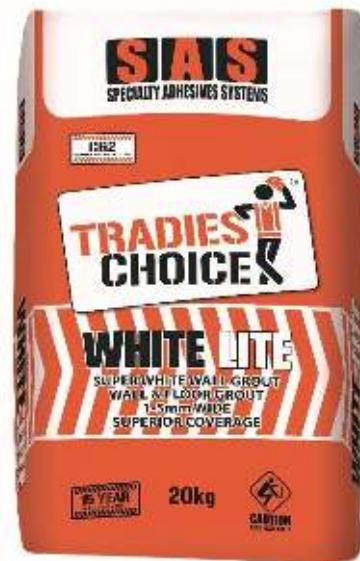

SAS Australasia Pty Ltd
1300 202 894
WWW.SAS-aa.COM.AU
ABN: 83 617 827 282

P2

Date: 1.2.19

Disclaimer: The information supplied is to the best of SAS knowledge and is true and accurate. The application of the product is beyond SAS control and any alleged failure or damage must be inspected by a representative from SAS. All workmanship must be carried out in accordance with AS 3958.1-2007.