


TECHNICAL BULLETIN



19 Motivation Dve Wangara, WA, 6065 AUSTRALIA
T +61 8 9302 4000 | FREE 1800 999 196 | F +61 8 9302 5000

CYCLONE

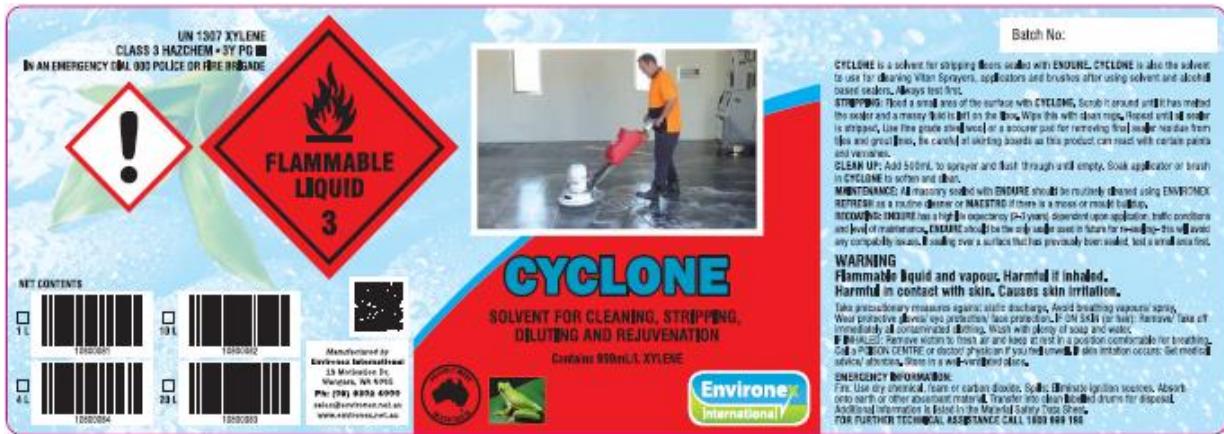

MATERIAL & FUNCTION

CYCLONE is a specialty solvent system specifically designed for dilution and/or removal of **ENDURE**.

APPLICATION

Sealer stripping - Flood 1 – 2 metres of surface to be stripped with **CYCLONE** and allow solvents to react with **ENDURE** for approximately five minutes. Saturate a rag in **CYCLONE** and wipe the sealer from the surface using a mopping action. Continue mopping process until sealer is removed from the floor. Try not to "wipe" or "mop" dissolved sealer into grout lines. Usage rate will be approximately 4 sq metres/litre. For removal of heavy buildups of **ENDURE**, more will be required.

Clean up Solvent - Brushes and applicators may be cleaned by soaking in this solvent.

Note - CYCLONE will not dissolve polyurethane sealants.

CAUTION

This product is highly flammable. Ensure adequate ventilation and no naked flames or smoking. Avoid contact with skin and eyes and avoid breathing vapour or spray mist.



created by free version of
DocuFreezer

PACKAGING

2 Litre, 10 Litre & 20 Litre containers.

IMPORTANT NOTICE TO CUSTOMER

*Since the use of this product is beyond the control of either seller or manufacturer, their only obligation shall be to replace any quantity of product which is proven defective. They cannot assume any risk or liability in excess of the purchase price of the product itself, which does not include labour or any consequential damages resulting from the use of this product. Determining the suitability of this product for any intended use shall be solely the responsibility of the user. **ALWAYS TEST FIRST.***