

ARDEX A38

Rapid Set Engineered Screed Cement

ARDEX A 38 is a rapid set engineered screed cement that has been designed for all types of floor coverings and is especially effective when installing moisture sensitive coverings. In addition it is compatible with ARDEX's entire PANDOMO range.

ARDEX A 38 produces a screed that improves on-site efficiencies by allowing traffic shortly after application and laying of the floor covering on the same day. The screed can be used as a:

- Bonded screed
- Unbonded screed (on a slipsheet or insulating layer)
- As a heated screed

SUBSTRATES

- New and existing concrete. For other substrates contact ARDEX Technical Services

THICKNESS

The nominal screed thickness when mixed with ARDEX Gravel Mix aggregate is:

- Unbonded at least 35mm; and preferably 40mm thick. Pandomo and heated floors normally require greater than 45mm thick
- Bonded screed it must be at least 15mm

DRYING TIME


- Can be walked on and is ready to receive tiles after 8 hours
- Ready for Terrazzo and smoothing cements after 24 hours
- Ready to receive resilient and textile floor coverings and parquet after 2 days

PACKAGING

- 20kg triple layered bag

CODE

11204

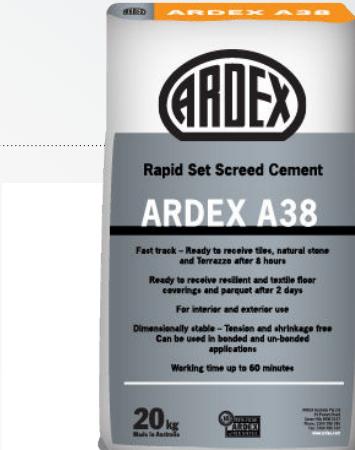

ARDEX A38 QUICK FACTS

- Fast track - ready to receive tiles, natural stone and Terrazzo in 8 hours
- For interior and exterior use
- Can be used in bonded and un-bonded applications



CONTACT US

1300 788 780 | www.ardexaustralia.com



Download the Ardex app
(search for 'ARDEX Australia')



SYSTEM **ARDEX**
PREMIUM PERFORMANCE