



Premium Concrete Floor Coatings

WATER-BASED, VOC-FREE COATINGS FOR TODAY AND TOMORROW...

Leader in innovative, premium quality and eco-friendly floor coatings

We offer a range of durable VOC-free floor coatings to upgrade new and existing concrete floors with a durable finish. Moreover, our coatings can also be applied to tiles and other surfaces in combination with Stellmann Primer.



H₂O

WATER-BASED & VOC-FREE

"Water-based means just that: water-based. No marketing fluff or deception. Our coatings are VOC-free and non-hazardous, with low odour. They're not only better for you and the environment but also for your floors."



DURABLE

Premium-quality signifies unrivaled durability. Our water-based coatings surpass both solvent- and oil-based systems in performance. Crafted with cutting-edge innovations, our coatings offer exceptional chemical and mechanical resistance."



USER FRIENDLY

At Stellmann, we prioritise the applicator. That's why we make coatings that are not only safe but also exceptionally user-friendly. Our systems offer superior rollability and up to four hours. Moreover, when applying to concrete, a separate primer is not needed.



UV-RESISTANT

We don't just settle for UV-stable; our systems are UV-resistant. This ensures our coatings remain vibrant under the Aussie sun, making them suitable for both interior and exterior applications.



NON-SLIP

Who said achieving a non-slip finish was challenging? Say farewell to unsightly roller marks or unevenly dispersed nonslip particles. With Stellmann Non-Slip particles, achieving a P3, P4 or P5 slip-rating is effortless.



COLOUR SELECTION

Choose from a range of popular grey finishes such as Light Grey, Traffic Grey or Anthracite Grey. Other colours include Traffic Yellow and White for demarcation or stair treads. Custom colours are available upon request.

Stellmann presents two top-tier, water-based concrete floor coatings. Aqualine MA DIY, a single-pack solution ideal for low to medium traffic areas, and Aqualine PU PRO, our two-pack system renowned for its superior durability and strength.



AQUALINE MA DIY

Aqualine MA DIY is a water-based, single-component MethAcrylic coating. It features a self-crosslinking system that provides UV resistance, ensuring durability against fading and saponification. This sets it apart as a superior option compared to other single-pack coating systems.

For areas light to medium-use areas such as:

- Indoor and outdoor concrete areas
- Stairs • Cellars • Walkways

● LIGHT GREY, RAL 7035 - 3L CC-050.003
● LIGHT GREY, RAL 7035 - 10L CC-050.010

AQUALINE PU PRO

Aqualine PU PRO stands as our flagship water-based, two-pack coating system. Representing the pinnacle of quality, it incorporates the latest advancements in polyurethane technology. With UV resistance and exceptional chemical and mechanical resilience,

Ideal for medium to high-traffic areas such as:

- Indoor and outdoor concrete floors
- Garages, parking lots • Walkways
- Staircases (full stair tread and/or nosing strip)
- Warehouses and factories

- LIGHT GREY, RAL 7035 CC-001.010
- TRAFFIC GREY, RAL 7042 CC-002.010
- ANTHRACITE GREY, RAL 7016 CC-003.010
- TRAFFIC WHITE, RAL 9016 CC-011.010
- TRAFFIC YELLOW, RAL 1023 CC-010.010
- TRAFFIC BLUE, RAL 5017 CC-012.010
- TRAFFIC GREEN, RAL 6024 CC-013.010
- TRAFFIC RED: RAL 3020 CC-014.010



Note: Colours represented are indicative only. Custom colours are available depending on quantity.

INSTALLATION GUIDELINE

Our innovative coatings offer a hassle free application process for concrete floors, eliminating the need for a primer. Both AQUALINE MA DIY and AQUALINE PU PRO are diluted with water, eliminating the need for thinners, and providing an environmentally friendly alternative to solvent- and epoxy-based coatings.

PRIME COAT Dilute first coat with 20 to 25% water, allowing it to penetrate the concrete.


SECOND COAT Dilute with 0 to 5% water. Add the Stellmann Non-Slip Particles for a slip-free surface. Consult our Technical Data Sheet for full installation instructions and tips how to achieve an excellent P3, P4, or P5 slip-rating.

RENOVATIONS Dilute both the first and second layer with 5 to 10% of water.

SURFACE GUIDELINES

The Stellmann coatings can be applied to concrete without the need for an additional primer. A pre-application surface inspection is paramount to every project. Refer to our TDS for full installation instructions and surface inspection guidelines.

Both AQUALINE systems can also be applied to substrates such as tiles, natural stone and metal in combination with the Stellmann Primer. Contact us for installation guidelines.

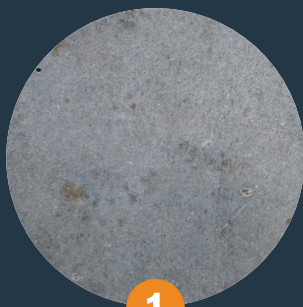

1
**ORIGINAL
CONCRETE FLOOR**



2
PRIME COAT
Diluted 20-25% with water




3
**SECOND COAT
(P2 SLIP RATING)**
Diluted 0-5% with water




4
**FINISH COAT
(P4 SLIP RATING)**
Diluted 0-5% with water

AQUALINE PU PRO INSTALLATION

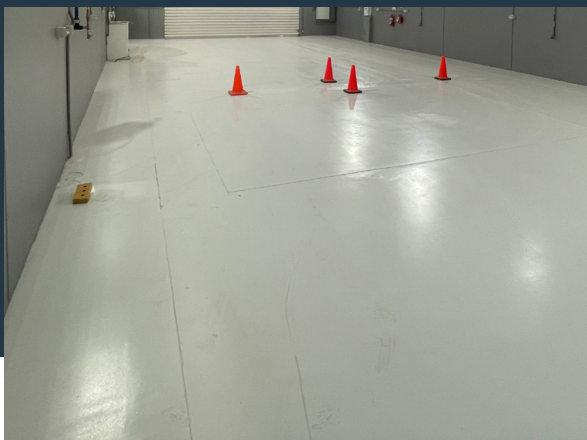

AQUALINE MA DIY INSTALLATION

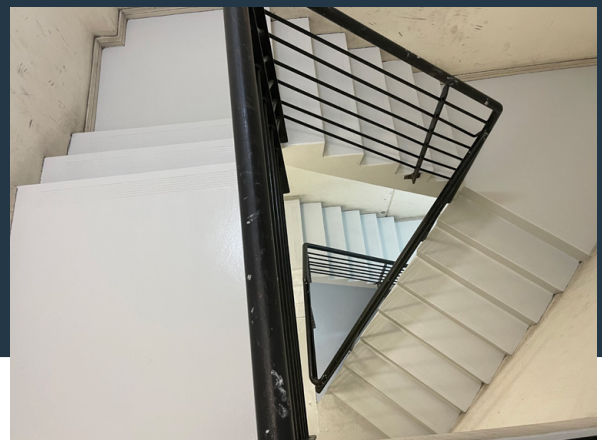

Contact us for a consultation and **FREE SAMPLE** 1300 987 095 info@stellmann.com.au

stellmann.com.au